



intersection

Radar for multi-lane intersection

THE TMB-133 IS AN "ALL-IN-ONE" MULTI-LANE MICROWAVE SENSOR FOR TRAFFIC SIGNAL REGULATION

- ✓ Virtual distant loops, activated on movement detection
- ✓ Virtual stop-line loops, activated on movement or presence detection
- ✓ 3 detection areas (virtual loops), configurable in function, size and position

SAVINGS ON BUDGETS FOR

- Road digging
- Security
- Intervention

HOW DOES IT WORK?

The user can define up to 3 virtual loops, all activated by vehicles or bicycles. The stop-line detection areas can be configured, per lane, as presence areas: the "loops" are activated until the object leaves the zone.

WHY A RADAR?

ABOVE GROUND TECHNOLOGY

- Safer for the traffic engineers, who can stay on the roadside for installation
- Less expensive: no road works and no traffic interruption needed for the installation


OPERATES UNDER ALL WEATHER CONDITIONS

Frost, snow, fog, etc. have no influence on the radar performance.

NO MAINTENANCE

No lens to clean, no calibration.

ADVANTAGES

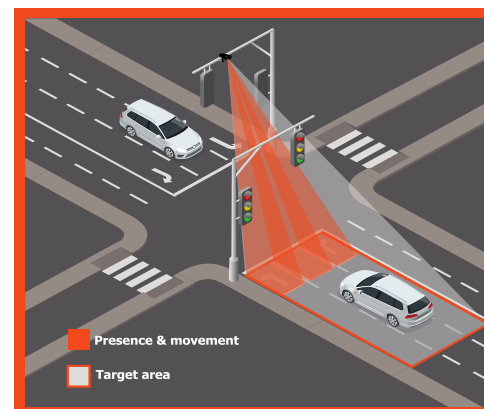

- ✓ 1 single radar to replace up to 3 inductive loops
- ✓ Turn-right/turn-left detection
- ✓ Stop-line presence

CT TECHNOLOGY

UK - Tel: 0161 443 4163 / Email: info@ct-technologyinfo.com / www.ct-technologyinfo.com. Floor 3, Broadstone Mill, Reddish, Stockport SK5 7DL
Ireland - Tel: 085 182 0969 / Email: chris@ct-technology.ie / www.ct-technology.ie

TMB-133



intersection

WHY AN ICOMS RADAR?

FIELD PROVEN AND RELIABLE

Thousands of ICOMS radars installed worldwide since 1993.

EASY TO USE & INSTALL

- Detachable cable at the rear side
- Delivered ready to install, i.e. including cable, fixing support, screws and bolts

SETTINGS

For each detection area/virtual loop:

- Size and position
- Function

TECHNICAL FEATURES

| | TMB-133 L | TMB-133 M | TMA-133 H |
|--------------------------------|---|--------------------------|--------------------------|
| Recommended configuration | Min. 14 m from stop-line (at the opposite side of the intersection) | | |
| Number of detection zones | 3 detection zones | | |
| Detection direction | Approaching | | |
| Detection range | Up to 70 m from the installation point | | |
| Max. detected speed | 99 km/h | | |
| User input | Wifi with web-based graphical interface | | |
| User output | 3 relays | | |
| Power supply | 8-30 V AC 10-60 V DC | 15-53 V AC 21-75 V DC | 100-240 V AC 50-60 Hz |
| Consumption | < 6 W | | |
| Environmental protection | IP65 | | |
| Dimensions (excl. bracket) | 68 x 99 x 151 mm | 68 x 99 x 234 mm | |
| Weight (excl. cable & bracket) | 0.446 kg | 0.605 kg | 0.631 kg |
| Mounting system | Specific mounting system supplied, adapted for M8 | | |
| Frequency | W-Band: 76-77 Ghz | | |
| Operating temperatures | From -40 °C to +60 °C | | |

OPTIONS

- Power supply:
 - 10-60 V DC / 8-30 V AC, 50-60 Hz
 - 21-75 V DC / 15-53 V AC, 50-60 Hz
 - 100-240 V AC, 50-60 H



STANDARDS

- Directive 2014/53/EU

CT TECHNOLOGY

UK - Tel: 0161 443 4163 / Email: info@ct-technologyinfo.com / www.ct-technologyinfo.com. Floor 3, Broadstone Mill, Reddish, Stockport SK5 7DL
Ireland - Tel: 085 182 0969 / Email: chris@ct-technology.ie / www.ct-technology.ie

TMB-133