

Moving & stopped vehicles detection and counting

THE TMA-122 IS AN "ALL-IN-ONE" MICROWAVE SENSOR FOR TRAFFIC SIGNAL REGULATION

- ✓ Virtual **approaching** inductive loop
- ✓ Virtual **stop-line** inductive loop
- ✓ **Counting** at the stop-line
- ✓ Bicycle, motorcycle & vehicle **movement** detection
- ✓ Bicycle, motorcycle & vehicle **presence** detection

SAVINGS ON BUDGETS FOR

- Road digging & cutting
- Security
- Intervention team

HOW DOES IT WORK?

When a vehicle approaches or stops in the targeted area, a relay output can be activated until it leaves the zone.

1 vehicle = 1 relay activation

WHY A RADAR?

ABOVE GROUND TECHNOLOGY

- Safer for the traffic engineers, who can stay on the roadside for installation
- Less expensive: no road works and no traffic interruption needed for the installation


IT OPERATES UNDER ALL WEATHER CONDITIONS

Frost, snow, fog, etc. have no influence on the radar performance.

NOMAINTEANCE

No lens to clean, no calibration.

ADVANTAGES

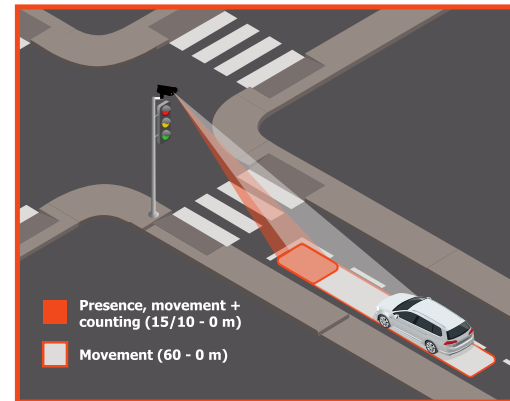

- ✓ 1 single radar replaces 2 inductive loops
- ✓ Settings without radar opening or software
- ✓ Self monitoring
- ✓ Counting at the stop-line

WHY AN ICOMS RADAR?

FIELD PROVEN AND RELIABLE

Thousands of ICOMS radars installed worldwide since 1993.

USERFRIENDLY

- Easy to install
- Detachable cable at the rear side
- Delivered ready to install, i.e. including cable, fixing support, screws and bolts
- Self-monitoring feature

TECHNICAL FEATURES

	TMA-122 LV	TMA-122 MV	TMA-122 HV
Detection range	Up to 60 m		
Detected speed	Up to 110 km/h Min. radial speed for target validation: 7 km/h Min. vehicle tracking speed: 0.8 km/h		
Detection direction	Approaching		
User output	2 relay contacts (resistive load : 30 V AC 0.3 A – 60 V DC 0.3 A) 2 visible LEDs on front face		
User input	2 rotary encoders		
Environmental protection	IP 65		
Frequency	K-band: 24.165 - 24.235 GHz		
Power supply	10-30 V AC 12-60 V DC	15-54 V AC 21-75 V DC	100-240 V AC 50-60 Hz
Power consumption	< 1.2 W @ 12 V DC	< 1.2 W @ 24 V DC	< 2 W @ 220 V AC
Temperature range	-40 °C to +60 °C		
Dimensions	68 x 99 x 119 mm	68 x 99 x 205 mm	
Weight (excl. cable & mounting support)	0,320 kg	0,510 kg	0,543 kg
Mounting system	Specific mounting system (supplied), adapted for M8		

OPTIONS

- power supply:
LV (10-30 V AC/12-60 V DC)
MV (15-54 V AC/21-75 V DC)
HV (100-240 V AC)



STANDARDS

- Directive 2014/53/EC
- FCC Part 15B class A (for LV version powered with 12 V)
- IC ICES-003 issue 6 (for LV version powered with 12 V)
- TOPAS 2505A

C&T TECHNOLOGY

UK - Tel: 0161 443 4163 / Email: info@ct-technologyinfo.com / www.ct-technologyinfo.com. Floor 3, Broadstone Mill, Reddish, Stockport SK5 7DL
Ireland - Tel: 085 182 0969 / Email: chris@ct-technology.ie / www.ct-technology.ie

TMA-122